

PRODUCTS OF SUPERIOR CRAFTSMANSHIP SINCE 1980

About Nadair's legacy

Since 1980, we've optimized the European blend of style and functionality, specializing in ceiling fans, lighting, and central vacuum systems. Our Innovative designs have made a global impact, resonating across Europe, Asia, and North America by introducing contemporary design, avant-garde functions, and great engineering for almost 45 years.

OVO novelty

We are delighted to introduce our brand-new line of range hoods.

Established in 2016, OVO by Nadair has quickly become synonymous with innovation and excellence in home solutions, and our latest range hoods showcase our unwavering commitment to being ahead of the curve.

Meticulously crafted to elevate your kitchen experience, these range hoods embody cutting-edge design, powerful functionality, and a dedication to enhancing the heart of your home.

Discover a perfect blend of style and efficiency as we redefine kitchen ventilation and lighthing. With new features that once again demonstrate the integration of lighting and fan tradition, we introduce selectable LED color temperatures (CCT) and dusk-to-dawn lighting with our newest range hoods that are designed to meet the diverse needs of modern living.

Efficient service, unmatched satisfaction

We take pride in servicing customers for more than 35 years. Our dedicated and passionate team will guide you through choosing the most suitable unit for your home and provide support during the installation and even afterwards via email, phone, chat, and social media. Choosing an OVO product means you're now a valued member of our community!



TABLE OF CONTENTS

1. ABOUT US	P.2
2. EXCLUSIVE FEATURES	P.4-5
3. UNDER CABINET RANGE HOODS	P.6-25
4. BUILT-IN RANGE HOODS · · · · · · · · · · · · · · · · · · ·	P.26-39
5. PYRAMID CONVERTIBLE RANGE HOODS	P.40-47
6. GLASS CANOPY RANGE HOODS	P.48-53
7. ACCESSORIES AND PARTS	P.53



EXCLUSIVE FEATURES


UNVEILING THE OVO RANGE HOODS WITH CCT (COLOR CHANGING TECHNOLOGY) & DUSK-TO-DAWN TECHNOLOGY A WELL DESERVED UPDATE TO THE RANGE HOOD INDUSTRY!

As a leader of integrated and non-integraded LED Lighting systems, we are proud to introduce simple, yet very appreciated features by the consumer in the lighting industry; the Selectable Color Temperature Changing LED Lights and Dusk-to-Dawn technology.

Developed through extensive consumer research and designed for both aesthetics and practicality these, range hoods provide unprecedented control over kitchen lighting ambiance, seamlessly transitioning between the five pre-set and built-in warm and cool tones of the white color sprectrum of light preferred by the North-American consumer to suit various tasks and moods ranging from 2700k to 5000k. Another innovative feature from our lighting heritage is the dusk-to-dawn light technology. If turn on the dusk-to-dawn light mode, the range hood lights will automatically open at sunset for a mellow ambiance all night until the morning when it shuts off at dawn!


5 SELECTABLE COLOR TEMPERATURE SETTINGS INTO 1 UNIT - CREATE YOUR AMBIANCE

For added style, you can easily match your OVO Range Hood lighting with other features in you kitchen such as under-cabinet, recessed and decorative lighting, creating a cohesive and sophisticated living space.

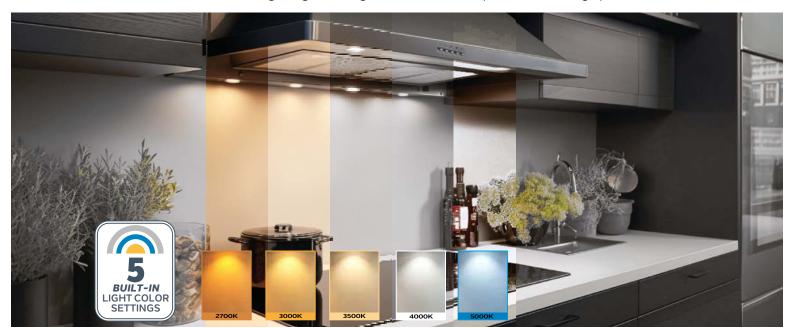

FROM DUSK-TO-DAWN

Thanks to the light sensor, your kitchen will always be well-lit. At sunset a soft night light will automatically turn on and it will turn off at dawn.

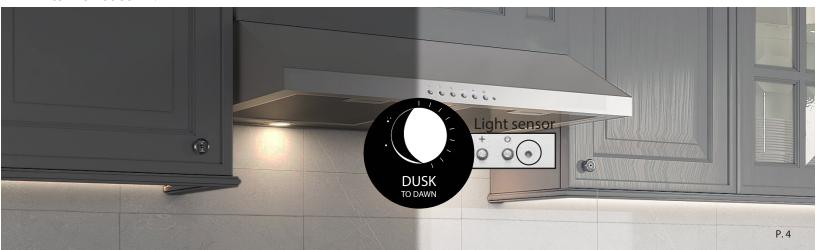

EXCLUSIVE FEATURES

3 LEVELS OF LIGHT INTENSITY

3-intensity LED light bulbs are ideal for energy savings, controllability adjustable ambiance and longevity. Select the desired intensity to create the perfect ambiance for your kitchen.




SMART RANGE HOOD

From central vacuum to slim lights, our innovated products gives us the opportunity to develop exclusive smart range hoods to follow the needed trend.







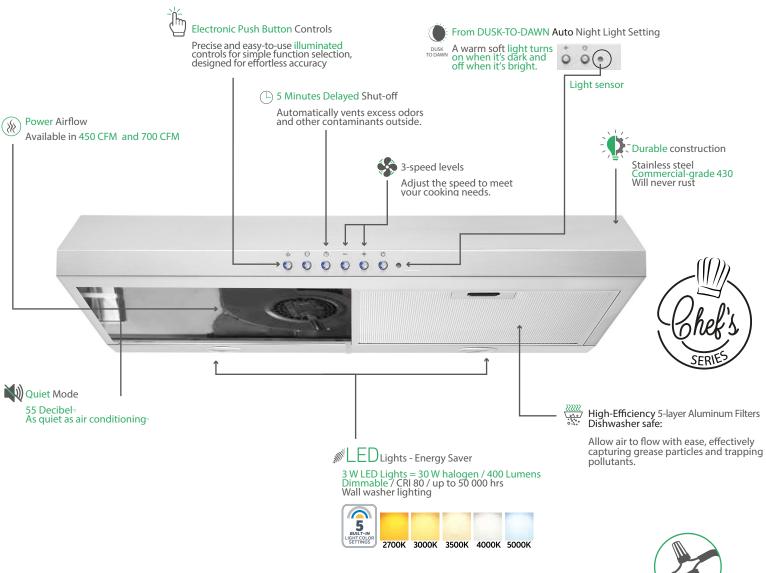

Hardwired



OV-1002

OV-1001

OV-1013



450 CFM



700 CFM



700 CFM









- *** Select this link to see the product video
- *** Select this link to see the product special features video

Features



3-speed levels




Electronic push button illuminated controls



From DUSK-TO-DAWN
Auto night light setting



5-minute Auto Shut-off





Dimmable 0% - 100%



5 Built-in light color temperature settings




55 dBA*2






MODEL NUMBER	OV-1002 OV-1001 / OV-10		
MATERIALS/FINISH			
FINISH	Stainless steel		
MATERIAL	Stainless steel Grade 430		
CONTROLS AND FEATURES			
CONTROLS TYPE	Electronic push button		
FAN SPEED	3-speed levels		
TIME DELAY	Yes		
AUTO NIGHT LIGHT	Yes		
LED DISPLAY	Yes		
VENTING			
FILTERS	5-Layer aluminum mesh filters - Dishwasher safe		
VENTING SIZE	6" (13.3 cm) round or 3 1/4" x 10" (8.3 cm x 25.4 cm) rectangle, top or rear		
EXTRACTION TYPE	Ducted		
LIGHTING			
LIGHT BULB TYPE	2 x 3 W LED - Included		
LUMENS	600 Lumens at 5000K setting		
COLOR TEMPERATURE	5 Built-in color temperature options (2700K to 5000K)		
MOTOR			
CFM	450	700	
POWER RATING	120 V / 60 Hz (cETlus Certified)		
INPUT	135W 195 W		
AMP	1.2A	1.8A	
NOISE LEVEL	55/65/73 dBA	TBC	
FAN TYPE	Centrifugal		
TYPE	Single Chamber Quiet		

Dimensions

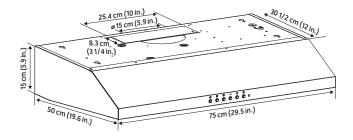





OV-1014

OV-1003



450 CFM



700 CFM









- *** Select this link to see the product video
- *** Select this link to see the product special features video

Features



3-speed levels



Electronic push button illuminated controls



From DUSK-TO-DAWN Auto night light setting



5-minute Auto Shut-off





Dimmable 0% - 100%



5 Built-in light color temperature settings





55 dBA*2






MODEL NUMBER	OV-1014 OV-1003		
MATERIALS/FINISH			
FINISH	Stainless steel		
MATERIAL	Stainless steel Grade 430		
CONTROLS AND FEATURES			
CONTROLS TYPE	Electronic push button		
FAN SPEED	3-speed levels		
TIME DELAY	Yes		
AUTO NIGHT LIGHT	Yes		
LED DISPLAY	Yes		
VENTING			
FILTERS	5-Layer aluminum mesh filters - Dishwasher safe		
VENTING SIZE	6" (13.3 cm) round or 3 1/4" x 10" (8.3 cm x 25.4 cm) rectangle, top or rear		
EXTRACTION TYPE	Ducted		
LIGHTING			
LIGHT BULB TYPE	2 x 3 W LED - Included		
LUMENS	600 Lumens at 5000K setting		
COLOR TEMPERATURE	5 Built-in color temperature options (2700K to 5000K)		
MOTOR			
CFM	450	700	
POWER RATING	120 V / 60 Hz (cETlus Certified)		
INPUT	135 W	TBC	
AMP	1.2 A	TBC	
NOISE LEVEL	55/65/73 dBA	55/65/73 dBA	
FAN TYPE	Centrifugal		
TYPE	Single Chamber Quiet		

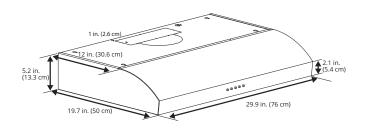





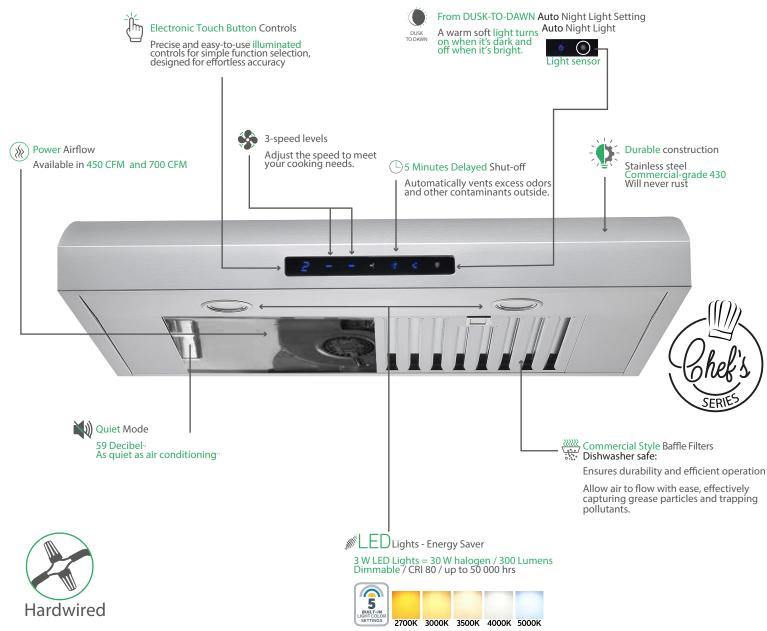

^{*1} Compare to the most popular air conditioning *2 Starting at 59 decibel at low speed



OV-1004





450 CFM



700 CFM









Special Features-



3-speed levels




Electronic push button illuminated controls



From DUSK-TO-DAWN Auto night light setting



5-minute Auto Shut-off





Dimmable 0% - 100%



5 Built-in light color temperature settings




59 dBA*2







MODEL NUMBER	OV-1004	OV-1024			
MATERIALS/FINISH					
FINISH	Stainless steel				
MATERIAL	Stainless steel Grade 430				
CONTROLS AND FEATURES					
CONTROLS TYPE	Electronic sensor touch				
FAN SPEED	3-speed levels				
TIME DELAY	Yes				
AUTO NIGHT LIGHT	Yes				
LED DISPLAY	Yes				
VENTING	•				
FILTERS	Thin baffle filters - Dishwasher	safe			
VENTING SIZE	6" (13.3 cm) round or 3 1/4" x 10" (8.3 cm x 25.4 cm) rectangle, top or rear				
EXTRACTION TYPE	Ducted				
LIGHTING					
LIGHT BULB TYPE	2 x 3 W LED - Included				
LUMENS	400 Lumens at 5000K setting				
COLOR TEMPERATURE	5 Built-in color temperature options (2700K to 5000K)				
MOTOR	MOTOR				
CFM	450	700			
POWER RATING	120 V / 60 Hz (cETlus Certified)				
INPUT	141W (135W + 2 x 3W)	195			
AMP	0.93A	18A			
NOISE LEVEL	59 / 65 / 71 dBA	TBC			
FAN TYPE	Centrifugal				
TYPE	Single Chamber Quiet				

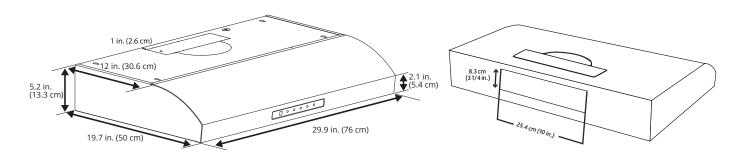



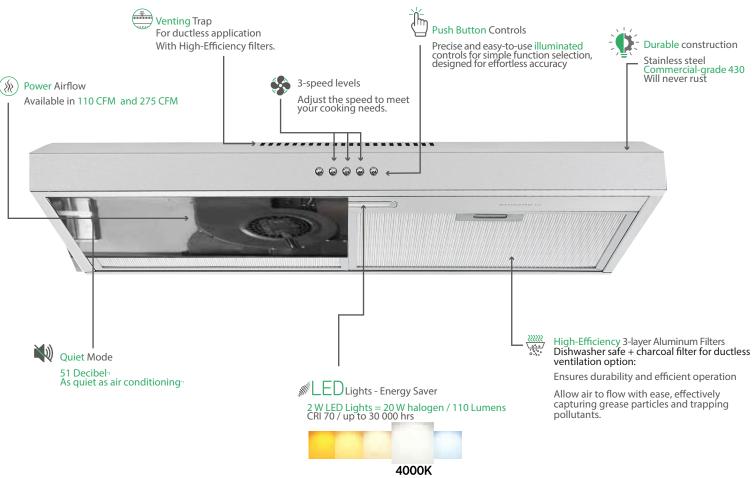

CONVERTIBLE: CAN BE INSTALLED DUCTED OR DUCTLESS



TOP AND REAR VENTING FOR DUCTED APPLICATION



TOP VENTING TRAP FOR DUCTLESS APPLICATION WITH CHARCOAL FILTER INCLUDED



^{*1} Compare to the most popular air conditioning

^{*2} Starting at 51 decibel at low speed

30" Convertible under cabinet range hood

Carbon filters included for a (Non-Vented/Duct-Free) ductless installation

OV-1026



110 CFM

OV-1006R




275 CFM







Features











51 dBA*2

*2 Starting at 51 decibel at low speed

30" Convertible under cabinet range hood

Carbon filters included for a (Non-Vented/Duct-Free) ductless installation

OV-1027



110 CFM

OV-1007RWH




275 CFM








Features












51 dBA*2


*2 Starting at 51 decibel at low speed

Convertible under cabinet range hood




MODEL NUMBER	OV-1026	OV-1006R	OV-1027	OV-1007RWH
MATERIALS/FINISH				
FINISH	Stainless steel		White	
MATERIAL	Stainless steel	Grade 430		
CONTROLS AND FEATURES				
CONTROLS TYPE	Mechanical pu	Mechanical push button		
FAN SPEED	3-speed levels	3-speed levels		
TIME DELAY	No	No		
AUTO NIGHT LIGHT	No	No		
LED DISPLAY	No			
VENTING	•			
FILTERS	3-Layer aluminum mesh filters / Dishwasher safe + Carbon filter fo ducles ventilation			
VENTING SIZE	6" (13.3 cm) rou 3 1/4" x 10" (8.3	6" (13.3 cm) round or 31/4" x 10" (8.3 cm x 25.4 cm) rectangle, top or rear		
EXTRACTION TYPE	Convertible: Ducted / Ductless			
LIGHTING				
LIGHT BULB TYPE	1x2WLED-In	1x2WLED-Included		
LUMENS	110 Lumens			
COLOR TEMPERATURE	4000K Cool wh	4000K Cool white		
MOTOR				
CFM	110	275	110	275
POWER RATING	120 V / 60 Hz (d	ETlus Certified	i)	
INPUT	80W	87W	80W	87W
AMP	0.69A	ТВС	0.69A	TBC
NOISE LEVEL	51/52/57 dBA	TBC	51/52/57 dBA	TBC
FAN TYPE	Centrifugal			
TYPE	Single Chamber Quiet			
	•			





Air trap plate for ducted application



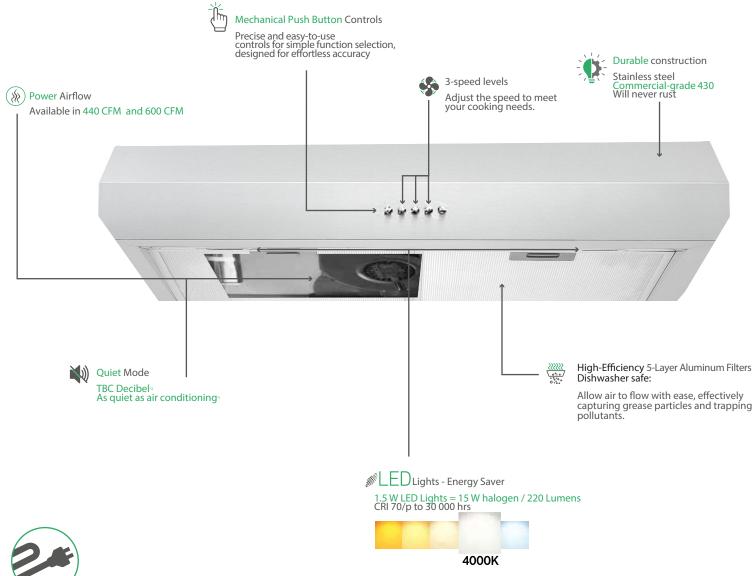

^{*1} Compare to the most popular air conditioning

^{*2} Starting at TBC decibel at low speed

OV-1017





450 CFM



600 CFM











Features













P. 20



MODEL NUMBER	OV-1017	OV-1009		
MATERIALS/FINISH				
FINISH	Stainless steel			
MATERIAL	Stainless steel Grade 430			
CONTROLS AND FEATURES				
CONTROLS TYPE	Mechanical push button			
FAN SPEED	3-speed levels			
TIME DELAY	No			
AUTO NIGHT LIGHT	No			
LED DISPLAY	No			
VENTING				
FILTERS	5-layer aluminum mesh filter - l	Dishwasher safe		
VENTING SIZE	6 " top round venting application			
EXTRACTION TYPE	Ducted			
LIGHTING				
LIGHT BULB TYPE	2 x 1.5 W LED			
LUMENS	200 Lumens			
COLOR TEMPERATURE	4000K Cool white			
MOTOR				
CFM	450	600		
POWER RATING	120 V / 60 Hz (cETlus Certified)			
INPUT	193W	303W		
AMP	1.61A	TBC		
NOISE LEVEL	TBC dBA	TBC		
FANTYPE	Centrifugal			
TYPE	Squirrel cage			







CONVERTIBLE: CAN BE INSTALLED DUCTED AND DUCTLESS



TOP AND REAR VENTED FOR **DUCTED INSTALLATION**



FRONT AIR TRAP FOR **DUCTLESS APPLICATION CARBON FILTER INCLUDED**



^{*1} Compare to the most popular air conditioning

^{*2} Starting at 46 decibel at low speed

30" Convertible under cabinet range hood

Carbon filters included for a (Non-Vented/Duct-Free) ductless installation

OV-1031



OV-1011R




225 CFM








Features











46 dBA*2

P. 23 *2 Starting at 46 decibel at low speed

30" Convertible under cabinet range hood

Carbon filters included for a (Non-Vented/Duct-Free) ductless installation

OV-1032



175 CFM

OV-1012R




225 CFM








Features












46 dBA*2

*2 Starting at 46 decibel at low speed

Convertible under cabinet range hood



MODEL NUMBER	OV-1032	OV-1011R	OV-1032	OV-1012R
MATERIALS/FINISH	•			
FINISH	Stainless steel	Stainless steel White		
MATERIAL	Stainless steel	Grade 430	•	
CONTROLS AND FEATURES	CONTROLS AND FEATURES			
CONTROLS TYPE	Rocker Switch			
FAN SPEED	2-speed levels			
TIME DELAY	No			
AUTO NIGHT LIGHT	No			
LED DISPLAY	No			
VENTING				
FILTERS			rs with charcoal tless ventilation	sheet - Dishwasher safe
VENTING SIZE	6" (13.3 cm) rou	und or	ectangle, top o	
EXTRACTION TYPE	Convertible: Du	-	-	
LIGHTING				
LIGHT BULB TYPE	1x 2W LED - Inc	cluded		
LUMENS	110 Lumens			
COLOR TEMPERATURE	4000K Cool wh	ite		
MOTOR				
CFM	175	225	175	225
POWER RATING	120 V / 60 Hz (d	ETlus Certified	d)	
INPUT	52W	225	52W	225
AMP	0.44A	TBC	0.44A	TBC
NOISE LEVEL	46/53 dBA	TBC	46/53 dBA	TBC
FAN TYPE	Centrifugal			
TYPE	Single Chamber Quiet			

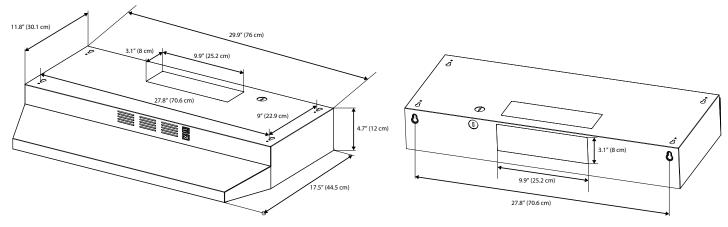







^{*1} Compare to the most popular air conditioning



28" Built-in range hood

OV-3015





680 CFM



900 CFM









- *** Select this link to see the product video
- *** Select this link to see the product special features video

Features



5-speed levels



Electronic push button illuminated controls



From DUSK-TO-DAWN Auto night light setting



5-minutes Auto Shut-off



2 x 3 W LED lights 400 Lumens*1



Dimmable 0% - 100%



5 Built-in light color temperature settings




ULTRA QUIET mode 43 dBA*2



Built-in range hood



MODEL NUMBER OV-3015 OV-3001 MATERIALS/FINISH **FINISH** Stainless steel MATERIAL Stainless steel Grade 430 **CONTROLS AND FEATURES CONTROLS TYPE** Electronic push button **FAN SPEED** 5-speed level TIME DELAY Yes AUTO NIGHT LIGHT Yes LED DISPLAY Yes **VENTING FILTERS** 5-Layer decorative filter - Dishwasher safe **VENTING SIZE** 6" (13.3 cm) round top venting **EXTRACTION TYPE** Built-in LIGHTING LIGHT BULB TYPE 2 x 3 W LED LUMENS 400 Lumens at 5000K setting 5 Built-in color temperature options (2700K to 5000K) **COLOR TEMPERATURE MOTOR** CFM 680 900 POWER RATING 120 V / 60 Hz (cETlus Certified) 406 W 806 W **INPUT** TBC AMP 3.4A NOISE LEVEL 43/67/73/77/78 dBA TBC **FAN TYPE** Centrifugal Squirrel cage TYPE

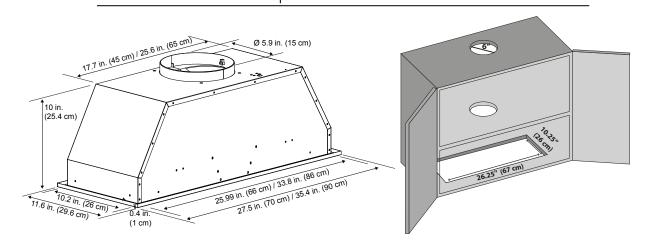









Features



5-speed levels



Electronic push button illuminated controls



From DUSK-TO-DAWN
Auto night light setting



5-minute Auto Shut-off



2 x 3 W LED lights 400 Lumens*1



Dimmable 0% - 100%



5 Built-in light color temperature settings




ULTRA QUIET mode 43 dBA*2




Built-in range hood




MODEL NUMBER	OV-3016	OV-3006	
MATERIALS/FINISH			
FINISH	Stainless steel		
MATERIAL	Stainless steel Grade 430		
CONTROLS AND FEATURES			
CONTROL TYPE	Electronic push button		
FAN SPEED	5-speed levels		
TIME DELAY	Yes		
AUTO NIGHT LIGHT	Yes		
LED DISPLAY	Yes		
VENTING	•		
FILTERS	5-layer decorative filter - Dishw	vasher safe	
VENTING SIZE	6" (13.3 cm) round top venting		
EXTRACTION TYPE	Built-in		
LIGHTING			
LIGHT BULB TYPE	2×3WLED		
LUMENS	400 Lumens at 5000K setting		
COLOR TEMPERATURE	5 Built-in color temperature options (2700K to 5000K)		
MOTOR			
CFM	680	900	
POWER RATING	120 V / 60 Hz (cETlus Certified)		
INPUT	406 W	806W	
AMP	3.4A	TBC	
NOISE LEVEL	43/67/73/77/78 dBA TBC		
FAN TYPE	Centrifugal		
TYPE	Squirrel Cage		

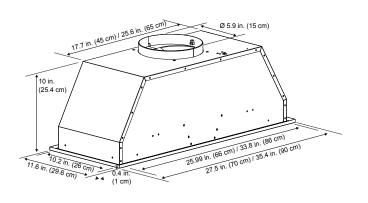





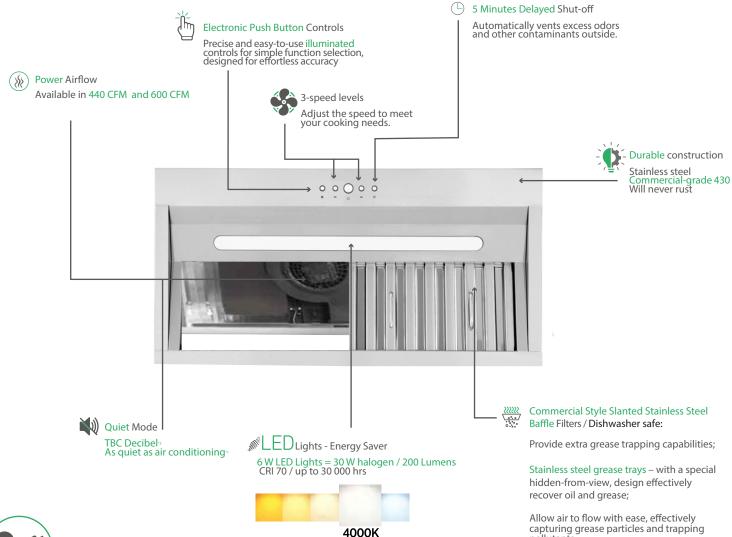



^{*1} Compare to the most popular air conditioning

^{*2} Starting at TBC decibel at low speed



28" Built-in range hood

OV-3022



450 CFM









Features



3-speed levels



Electronic push button controls



5-minutes
Auto Shut-off





4000K Cool white



TBC dBA*2

P. 33


*2 Starting at TBC decibel at low speed




Built-in range hood




MODEL NUMBER	OV-3022	OV-3013			
MATERIALS/FINISH					
FINISH	Stainless steel				
MATERIAL	Stainless steel Grade 430				
CONTROLS AND FEATURES					
CONTROLS TYPE	Electronic push button				
FAN SPEED	3-speed levels				
TIME DELAY	Yes				
AUTO NIGHT LIGHT	No				
LED DISPLAY	Yes				
VENTING					
FILTERS	2 Slanted Baffle filters - Dishwasher safe				
VENTING SIZE	6" (13.3 cm) round top venting				
EXTRACTION TYPE	Built-in				
LIGHTING					
LIGHT BULB TYPE	1x6WLED-Included				
LUMENS	200 Lumens				
COLOR TEMPERATURE	4000K cool white				
MOTOR					
CFM	450	600			
POWER RATING	120 V / 60 Hz (cETlus Certified)				
INPUT	196W 380W				
AMP	31.7 A	TBC			
NOISE LEVEL	TBC dBA TBC				
FAN TYPE	Squirrel cagel				

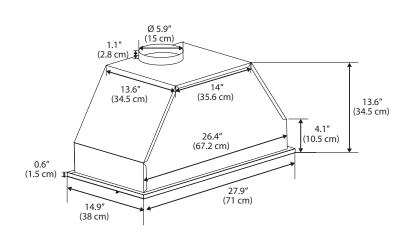





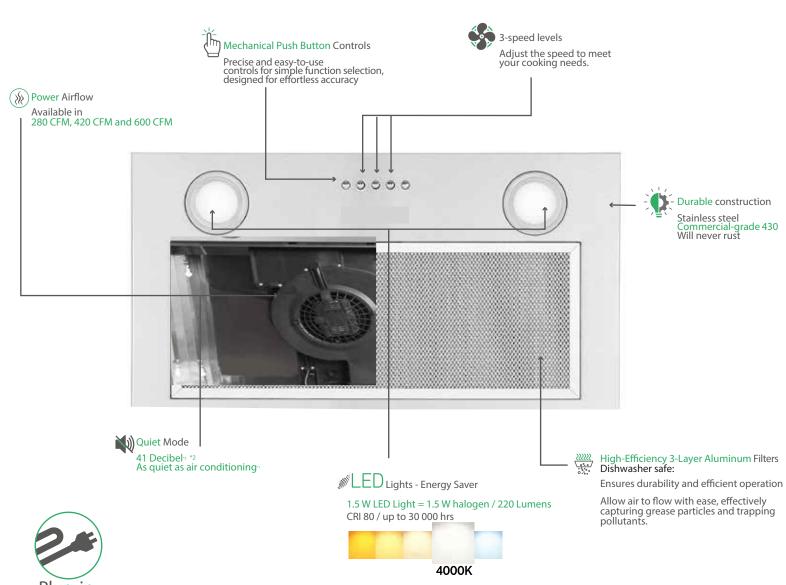

^{*1} Compare to the most popular air conditioning *2 Starting at 41 decibel at low speed

28" Built-in range hood

OV-3006

OV-3019

OV-3029



280 CFM



440 CFM



600 CFM



OV-3006






OV-3019/3029







Features












41 dBA*2


P. 36

Built-in range hood



MODEL NUMBER	OV-3006	OV-3019	OV-3029		
MATERIALS/FINISH	MATERIALS/FINISH				
FINISH	Stainless steel				
MATERIAL	Stainless steel Grade 43	0			
CONTROLS AND FEATURES					
CONTROL TYPE	Mecanical push button				
FAN SPEED	3-speed levels				
TIME DELAY	No				
AUTO NIGHT LIGHT	No				
LED DISPLAY	No				
VENTING	•				
FILTERS	3-layer aluminum mesh filter / Dishwasher safe				
VENTING SIZE	6" (13.3 cm) round top venting				
EXTRACTION TYPE	Built-in				
LIGHTING					
LIGHT BULB TYPE	2 x 1.5 W LED				
LUMENS	220 Lumens				
COLOR TEMPERATURE	4000K cool white				
MOTOR	MOTOR				
CFM	280	440	600		
POWER RATING	120 V / 60 Hz (cETlus Certified)				
INPUT	88 W	193W	383W		
AMP	0.8 A	1.6 A	TBC		
NOISE LEVEL	41/50/57 dBA	TBC			
FAN TYPE	Centrifugal				
TYPE	Squirrel cage				

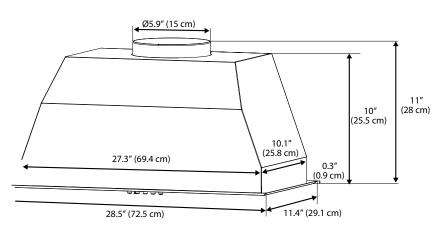



20.5" Built-in range hood

OV-3004

OV-3018

OV-3028



280 CFM



420 CFM



600 CFM



OV-3004






OV-3018/3028







Features













P. 38

Built-in range hood



MODEL NUMBER	OV-3004	OV-3018	OV-3028
MATERIALS/FINISH			
FINISH Stainless steel			
MATERIAL	Stainless steel Grade 430		

CONTROLS AND FEATURES

CONTROLS TYPE	Electronic push button
FAN SPEED	3-speed levels
TIME DELAY	No
AUTO NIGHT LIGHT	No
LED DISPLAY	No

VENTING


FILTERS	3-Layer aluminum mesh filter - Dishwasher safe
VENTING SIZE	6" (13.3 cm) round top venting
EXTRACTION TYPE	Built-in


LIGHTING

LIGHT BULB TYPE	2 x 1.5 W LE - IncludedD
LUMENS	220 Lumens
COLOR TEMPERATURE	4000K cool white

MOTOR

280	420	600
120 V / 60 Hz (cETlus Certified)		
88 W	ТВС	ТВС
0.8 A	1.6 A	TBC
41/50/58 dBA	TBC	
Centrifugal		
Single Chamber Quiet		
	120 V / 60 Hz (cETlus Co 88 W 0.8 A 41/50/58 dBA Centrifugal	120 V / 60 Hz (cETlus Certified) 88 W TBC 0.8 A 1.6 A 41/50/58 dBA TBC Centrifugal

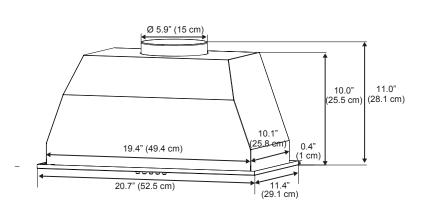









4000K

*1 Compare to the most popular air conditioning

^{*2} Starting at TBC decibel at low speed

Can be converted to an internal recirculation unit with purchase of a conversion kit, (Sold separately).

OV-2020



280 CFM

OV-2005



OV-2005






OV-2020







Features











TBC dBA*2

*2 Starting at TBC decibel at low speed

Can be converted to an internal recirculation unit with purchase of a conversion kit, (Sold separately).

OV-2031WH



280 CFM

OV-2007WH



OV-2007WH






OV-2031WH







Features












TBC dBA*2

*2 Starting at TBC decibel at low speed


Convertible pyramid range hood



MODEL NUMBER	OV-2020	OV-2005	OV-2031WH	OV-2007WH	
MATERIALS/FINISH					
FINISH	Stainless stee	j	White		
MATERIAL	Stainless stee	el Grade 430			
CONTROLS AND FEATURES					
CONTROLS TYPE	Mechanical p	oush button			
FAN SPEED	3-speed leve	ls			
TIME DELAY	No				
AUTO NIGHT LIGHT	No				
LED DISPLAY	No				
VENTING					
FILTERS	5-Layer aluminum mesh filters / Dishwasher safe				
VENTING SIZE	6 '' (13.3 cm) r	ound top vent	ing		
EXTRACTION TYPE	Convertible: Ducted / Ductless (Conversion kit sold separately)				
LIGHTING					
LIGHT BULB TYPE	2 x 1.5 W LED	- Included			
LUMENS	220 Lumens				
COLOR TEMPERATURE	4000K Cool w	hite			
MOTOR					
CFM	280	450	280	450	
POWER RATING	120 V / 60 Hz (cETlus Certified)				
INPUT	85W	190W	85W	190W	
AMP	1.6 A	TBC	1.6 A	TBC	
NOISE LEVEL	ТВС	TBC	TBC	TBC	
FAN TYPE	Centrifugal				
TYPE	Single Chamber Quiet				





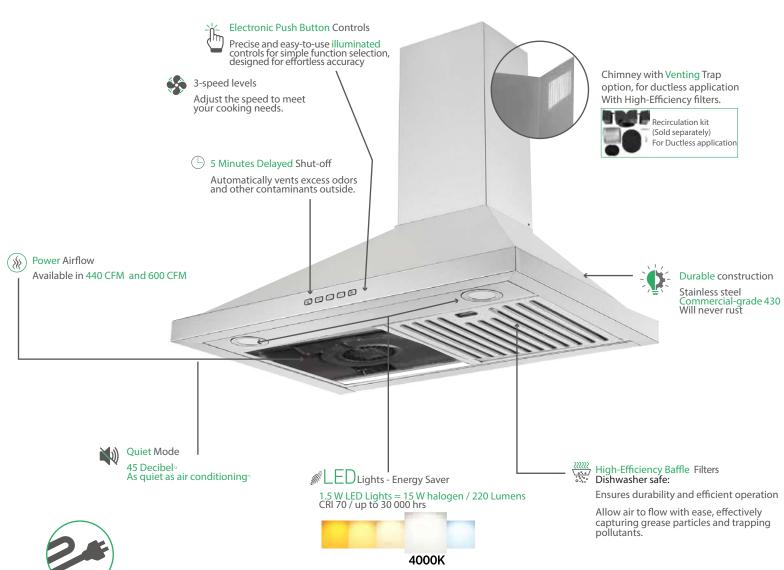

*1 Compare to the most popular air conditioning

Plug-in

*2 Starting at 45 decibel at low speed



Can be converted to an internal recirculation unit with purchase of a conversion filter kit, (Sold separately).

OV-2022














Features











45 dBA*2


P. 46 *2 Starting at 45 decibel at low speed



Convertible pyramid range hood




MODEL NUMBER	OV-2022	OV-2002		
MATERIALS/FINISH				
FINISH	Stainless steel	Stainless steel		
MATERIAL	Stainless steel Grade 430			
CONTROLS AND FEATURE	īS			
CONTROLS TYPE	Electronicl push button			
FAN SPEED	3-speed levels			
TIME DELAY	Yes			
AUTO NIGHT LIGHT	No			
LED DISPLAY	Yes			
VENTING				
FILTERS	Baffle / Dishwasher safe			
VENTING SIZE	6" (13.3 cm) round top ven	•		
EXTRACTION TYPE	Convertible: Ducted / Ductless (Conversion kit sold separately)			
LIGHTING				
LIGHT BULB TYPE	2 x 1.5 W LED			
LUMENS	220 Lumens			
COLOR TEMPERATURE	4000K Cool white			
MOTOR				
CFM	450	600		
POWER RATING	120 V / 60 Hz (cETlus Certi	fied)		
INPUT	190W 380W			
AMP	1.6 A	TBC		
NOISE LEVEL	TBC TBC			
FAN TYPE	Centrifugal			
TYPE	Single Chamber Quiet			







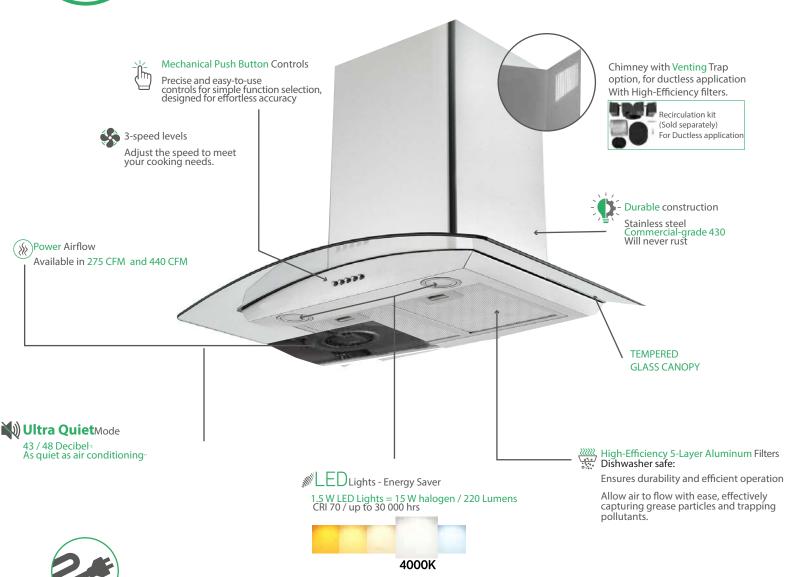

*1 Compare to the most popular air conditioning

*2 Starting at 43 \$ 48 decibel at low speed

Can be converted to an internal recirculation unit with purchase of a conversion filter kit, (Sold separately).

OV-2004




450 CFM







Features











43 dBA*2

*2 Starting at 43 decibel at low speed

Can be converted to an internal recirculation unit with purchase of a conversion filter kit, (Sold separately).

OV-2023



600 CFM










Features














*2 Starting at 45 decibel at low speed


Convertible wall-mount range hood



MODEL NUMBER	OV-2004	OV-2023		
MATERIALS/FINISH				
FINISH	Stainless steel			
MATERIAL	Stainless steel Grade 430			
CONTROL AND FEATUR	RES			
CONTROL TYPE	Mechanical push button			
FAN SPEED	3-speed levels			
TIME DELAY	No			
AUTO NIGHT LIGHT	No	No		
LED DISPLAY	no			
VENTING				
FILTERS	5-Layer aluminum mesh filter / D	5-Layer aluminum mesh filter / Dishwasher safe		
VENTING SIZE	6" (13.3 cm) round top venting	6" (13.3 cm) round top venting		
EXTRACTION TYPE	Convertible: Ducted and ductless	Convertible: Ducted and ductless (conversion kit sold separately		
LIGHTING				
LIGHT BULB TYPE	2 x 1.5 W LED - Included			
LUMENS	220 Lumens			
COLOR TEMPERATURE	4000K cool white			
MOTOR				
CFM	450	600		
POWER RATING	120 V / 60 Hz (cETlus Certified)			
INPUT	88 W (85W + 2 x 1.5W)	193 W (190W + 2 x 1.5W)		
AMP	0.8 A 1.6 A			
NOISE LEVEL	43/51/57 dBA 46/54/59 dBA			
FAN TYPE	Squirrel Cage			
-	†			



Available parts and accessories sold separately

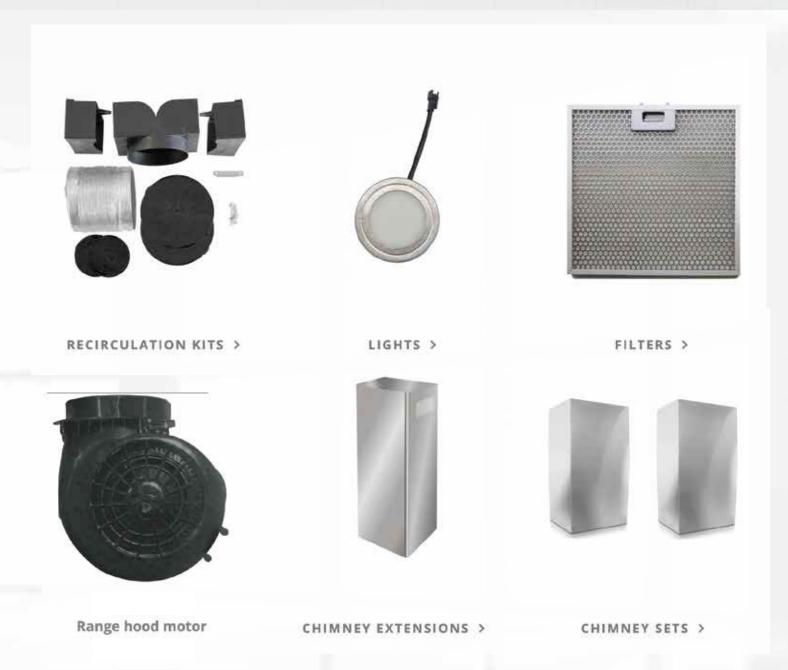

Please contact us at 1-800-776-7891 / info@myovo.net or visit our website at www.myovo.net/rangehood/parts, if you need replacement parts.



2044 HIGHWAY440 WEST LAVAL, QC, H7S 2M9

1-800-776-7891

INFO@MYOVO.NET